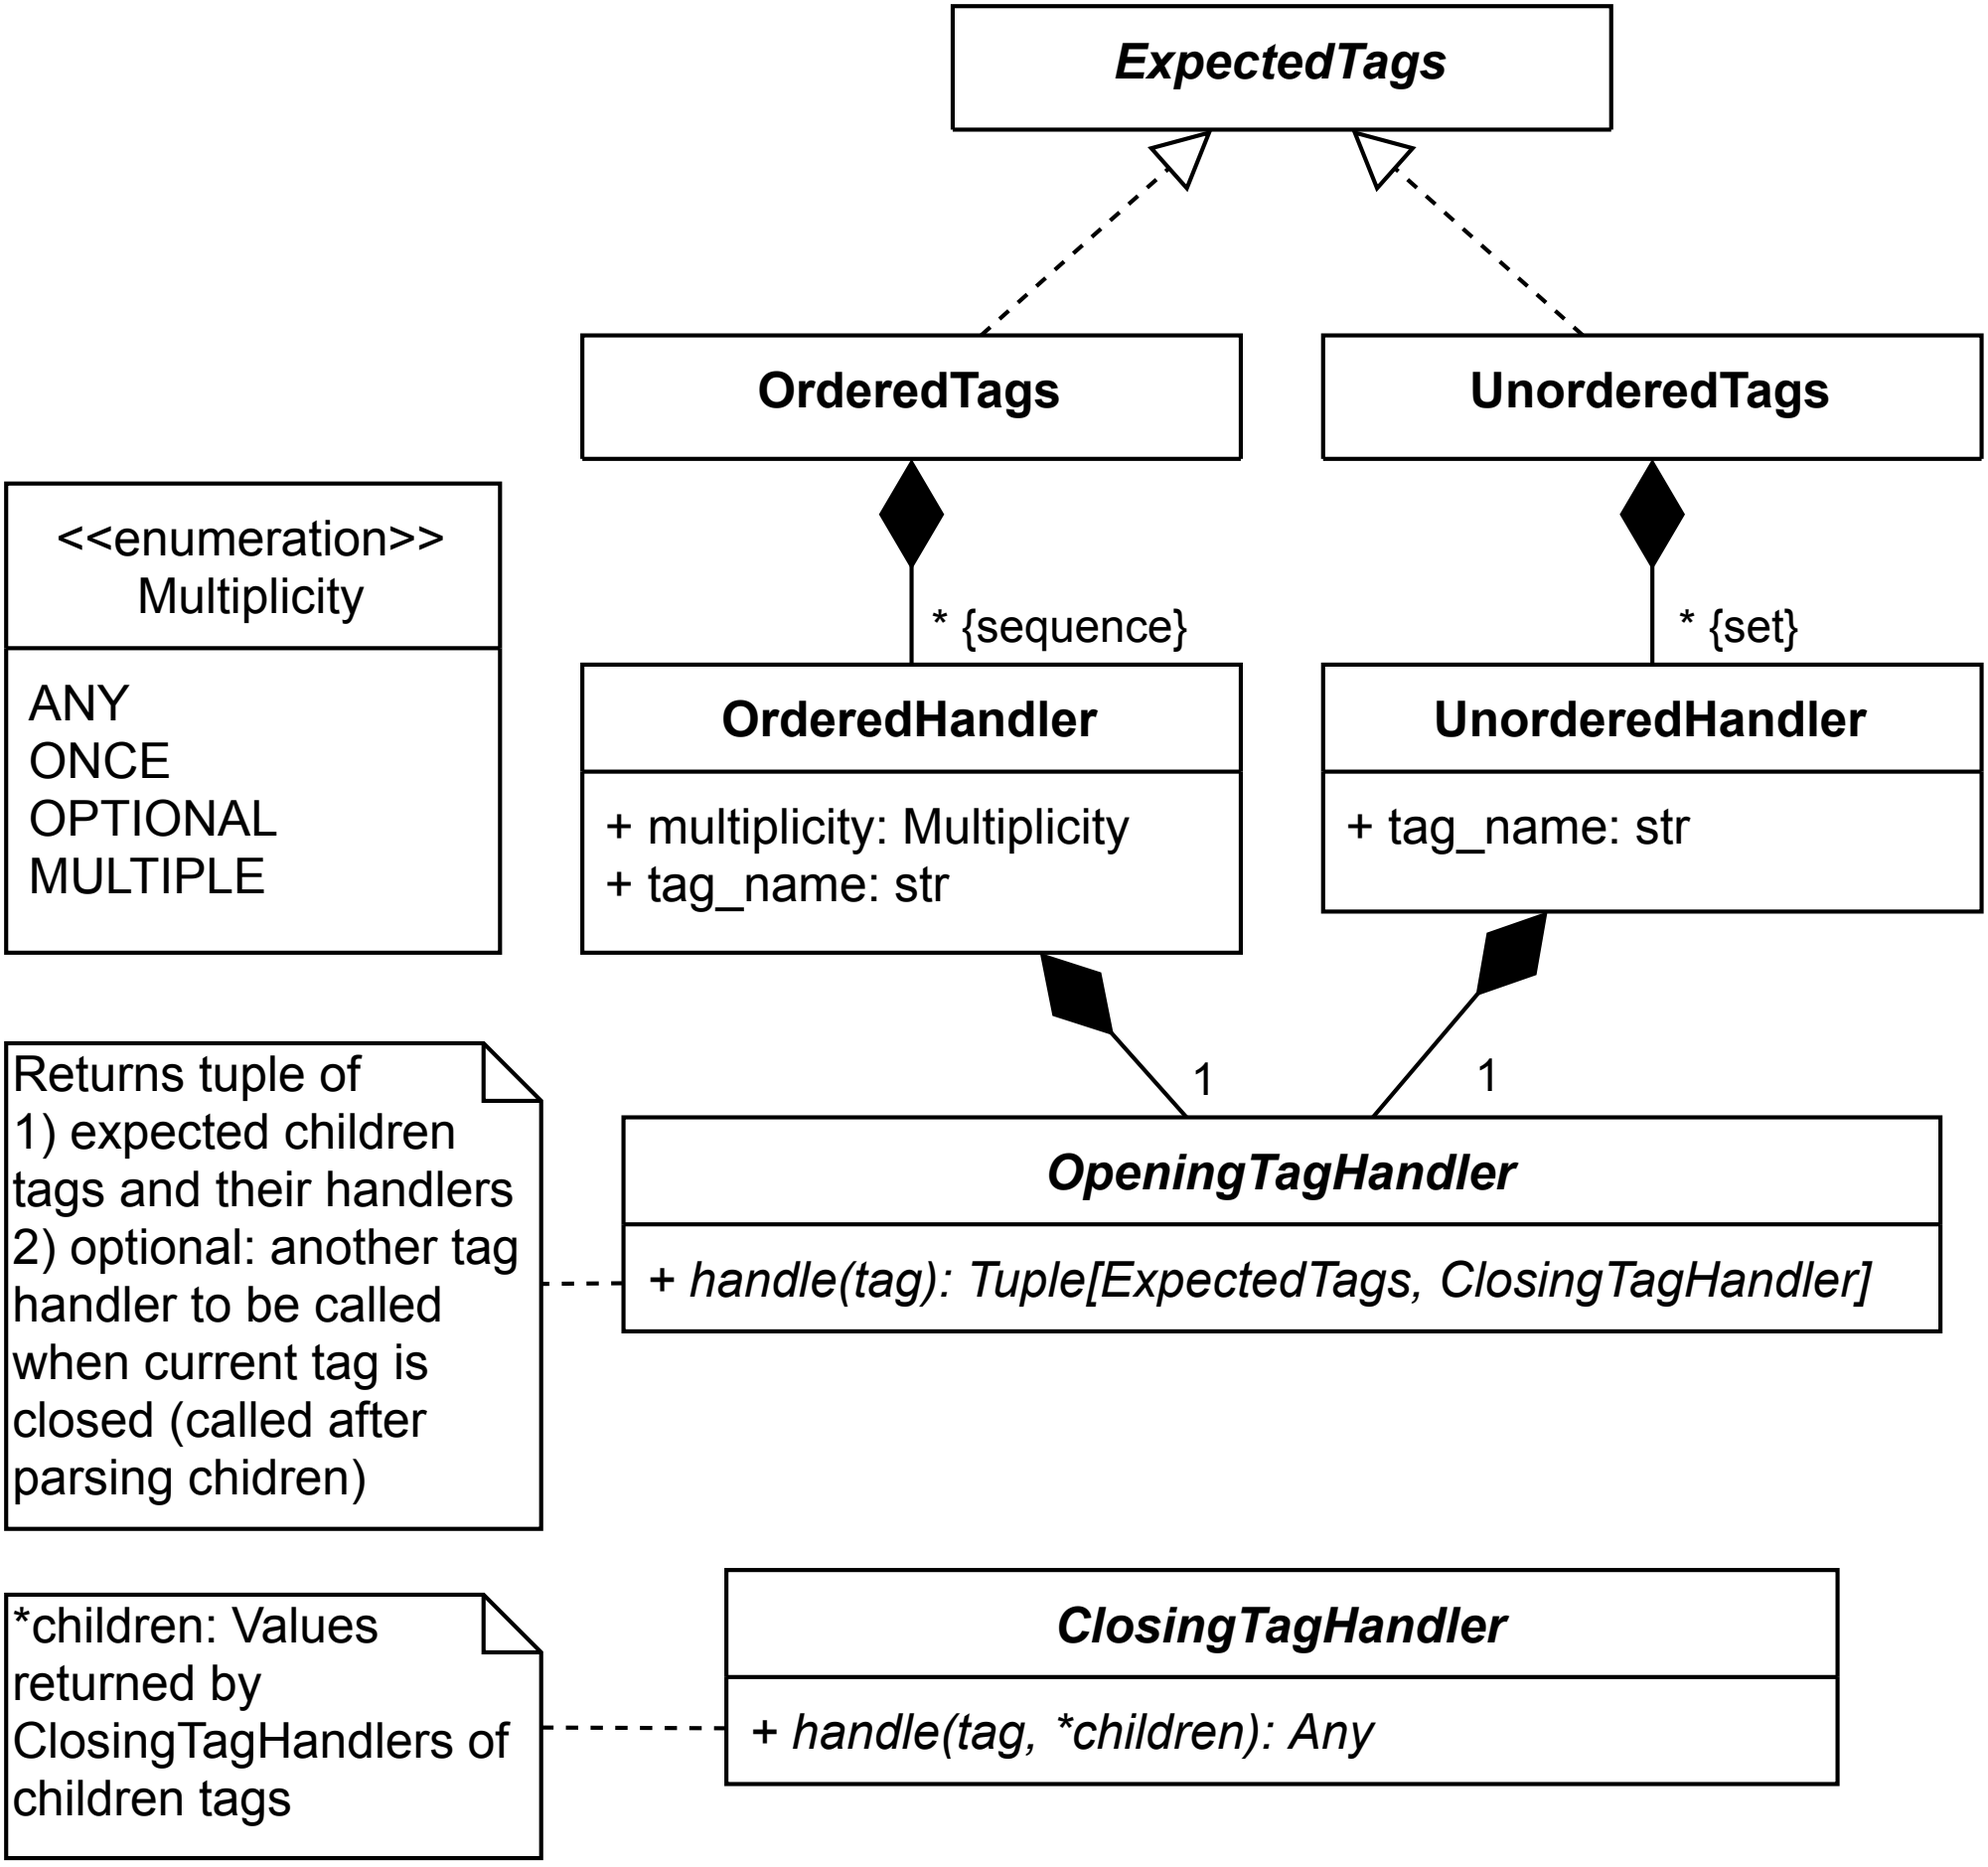
ExpectedTags
OrderedTags
UnorderedTags
<<enumeration>>
Multiplicity
ANY
ONCE
OPTIONAL
MULTIPLE
* {sequence}
* {set}
OrderedHandler
+ multiplicity: Multiplicity
+ tag_name: str
UnorderedHandler
+ tag_name: str
1
1
Returns tuple of
1) expected children
tags and their handlers
2) optional: another tag
handler to be called
when current tag is
closed (called after
parsing chidren)
OpeningTagHandler
+ handle(tag): Tuple[ExpectedTags, ClosingTagHandler]
*children: Values
returned by
ClosingTagHandlers of
children tags
ClosingTagHandler
+ handle(tag, *children): Any